



# SN-B1325BZ-R-CZ

5MP Vari-focal Hybrid Analogue Bullet Camera




## Key Features

- 1/2.8" Progressive Scan CMOS
- 2.7~13.5mm motorized lens
- Max 20fps@5MP
- Video Transmission 300m
- IR distance up to 40m
- 3D DNR, WDR, ICR, BLC, ATW, Mirror
- Support AHD/TVI/CVI/CVBS Output
- IP67

## Specification

Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Signal System	PAL/NTSC
Electronic Shutter	Auto
Min. illumination	Color: 0.01 Lux @ (F1.2, GC ON), B/W: 0 Lux @ (IR LED ON)
S/N Ratio	More than 48dB
IR Distance	up to 40m
IR LEDs	4 pcs
OSD Joystick	Support
Up the Coax	Support
Pan/Tilt/Rotation Range	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°
Lens	
Lens Type	Motorized focus
Iris	Fixed Iris
Focal Length	2.7 ~ 13.5mm
F Number	F1.6
Angle of View	H: 100.8°~32°, V: 74°~24.5°
Video	
Resolution	5MP (2560x1944)
Frame Rate	AHD/TVI: 5MP @ 20/12.5fps, 4MP @ 25/30/15fps, CVI: 4MP @ 25/30fps, CVBS: PAL/NTSC
Video Output	Support AHD/TVI/CVI/CVBS Output
Day/Night	AUTO / Color / B/W / Ext
OSD Menu	Support
Wide Dynamic Range	WDR, OFF/ON
Gain Control	Auto
Noise Reduction	2D/3D DNR, Auto/Manual
White Balance	Auto
BLC	Support
Mirror	Support
General	
Power Supply	DC12V ±10%
Power Consumption	Max. 5.5W (12V DC, IR ON)
Operating Temperature	-10 °C ~ 55 °C (14°F ~ 131 °F)
Operating Humidity	Less than 85% RH
Ingress Protection	IP67
Certifications	CE/FCC
Casing	Metal
Dimensions	232 × 80 × 80 mm (9.14 x 3.15 x 3.15 inch)
Net Weight	0.65 kg

## Dimensions(mm)

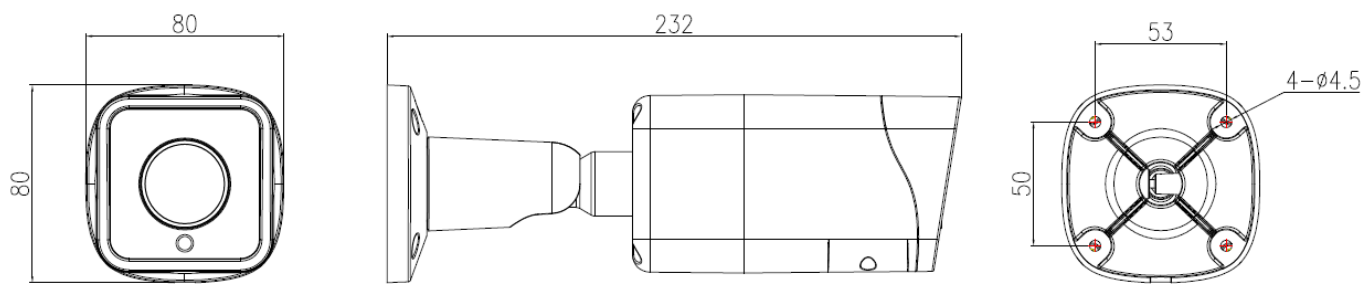

## Accessories

### Optional:



SN-CBK656A  
Junction Box



SN-CBK627D  
Pole Mount