



SN-B1328BZ-R-CZ

8MP Motorized Hybrid HD Analogue Bullet Camera




Key Features

- 1/2.8" Progressive Scan CMOS
- 2.7~13.5mm motorized lens
- Max 15fps@8MP
- Video transmission 300m
- IR distance up to 40m
- 3D DNR, WDR, ICR, GLOBE, ATW
- Support AHD/TVI/CVI/CVBS Output
- IP67

Specification

Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Signal System	PAL/NTSC
Min. illumination	Color: 0.01 Lux @ (F1.2, AGC ON), B/W: 0 Lux @ (IR LED ON)
S/N Ratio	More than 50dB
IR Distance	Up to 40 m
IR LEDs	4 pcs
OSD Joystick	Support
Up the Coax	Support
Pan/Tilt/Rotation Range	Pan:0°~360°, Tilt:0°~90°, Rotation:0°~360°
Lens	
Lens Type	Motorized focus
Iris	Fixed Iris
Focal Length	2.7~13.5mm
F Number	F1.6
Angle of View	H: 100°~30.5°, V: 53.6°~17.1°
Video	
Resolution	8MP (3840×2160)
Frame Rate	15fps
Video Output	Support AHD/TVI/CVI/CVBS Output
Day/Night	ICR, AUTO/COLOR/MONO/ Ext
OSD Menu	Support
Wide Dynamic Range	OFF/ON
Gain Control	Auto
Noise Reduction	3D DNR, Auto/Manual (0-10)
White Balance	Auto
BLC	Support
General	
Power Supply	DC12V ±10%
Power Consumption	Max. 6.5W (12V DC, IR ON)
Operating Temperature	-10 °C ~ 55 °C (14°F ~ 131 °F)
Operating Humidity	Less than 85% RH
Ingress Protection	IP67
Certifications	CE/FCC
Casing	Metal
Dimensions	232 × 80 × 80mm (9.13" × 3.15" × 3.15")
Net Weight	0.65 kg (1.43 lb)

Dimensions(mm)

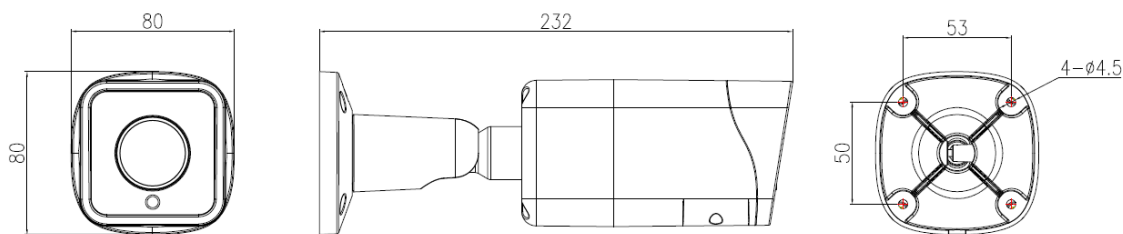

Accessories

Optional:



SN-CBK656A
Junction Box



SN-CBK627D
Pole Mount