



SN-E1328HZ-R-CB

8MP Hybrid HD Analogue Eyeball Camera




Key Features

- 1/2.8" Progressive Scan CMOS
- 3.6mm fixed lens
- Max 15fps @8MP
- Video transmission 300m
- IR distance up to 20m
- 3D DNR, WDR, ICR, GLOBE, ATW
- Support AHD/TVI/CVI/CVBS Output
- IP66

Specification

Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Signal System	PAL/NTSC
Min. illumination	Color: 0.01 Lux @ (F1.2, AGC ON), B/W: 0 Lux @ (IR LED ON)
S/N Ratio	More than 50dB
IR Distance	Up to 20 m
IR LEDs	2pcs
OSD Joystick	Support
Up the Coax	Support
Pan/Tilt/Rotation Range	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°
Lens	
Lens Type	Fixed focus
Iris	Fixed Iris
Focal Length	3.6mm
F Number	F2.0
Angle of View	H: 84.4°, V: 45.5°
Video	
Resolution	8MP (3840×2160)
Frame Rate	15fps
Video Output	Support AHD/TVI/CVI/CVBS Output
Day/Night	ICR, AUTO/COLOR/MONO/ Ext
OSD Menu	Support
Wide Dynamic Range	OFF/ON
Gain Control	Auto
Noise Reduction	3D DNR, Auto/Manual (0-10)
White Balance	Auto
BLC	Support
General	
Power Supply	DC12V ±10%
Power Consumption	Max. 5W (12V DC, IR ON)
Operating Temperature	-10 °C ~ 55 °C (14°F ~ 131 °F)
Operating Humidity	Less than 85% RH
Ingress Protection	IP66
Certifications	CE/FCC
Casing	Metal + Plastic
Dimensions	Φ111×95 mm (Φ4.37" × 3.74")
Net Weight	0.35 kg (0.77 lb)

Dimensions(mm)

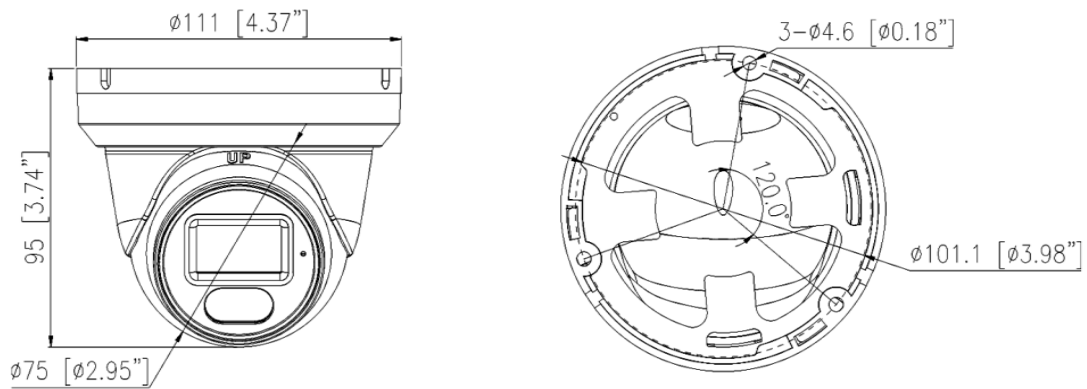

Accessories

Optional:



SN-CBK646M
Junction Box



SN-CBK203
Pendant Cap



SN-CBK402
Pendant Mount



SN-CBK501
Wall Mount



SN-CBK502
Wall Mount



SN-CBK101
Pole Mount



SN-CBK102
Corner Mount